

ELECTRICAL SPECIFICATIONS

Range of Use:		AC 3
Operating Voltage:	Ue	400V AC
Operating Frequency:	f	50-60 Hz
Operating Current:	Ie	1,6-2,5 V AC
Thermal Current:	Ith	32A
Insulation Voltage:	Ui	690 V AC
Stroke Resistance Voltage:	Uimp	6 kV
Short Circuit Breaking Capacity	Icn:	6 kA
Insulation Resistance:		10MΩ



TECHNICAL INFORMATION

BODY:

Temperature compensated



Phase failure protection

Isolating and main switch function IEC 204-1

Fast and simple mounting feature to 35 mm mounting rail with a wide variety of accessories available

GENERAL:

Operating Temperature	Min./Max. °C	-5/+40
Mechanical Life		100.000 min.
Electrical Life		100.000 min.
Contact Block Tightening Torque		1,8 Nm
Contact Block Connection Wire Profile		0,75-2,5 / 0,75-4 mm ²
Protection Degree		IP40

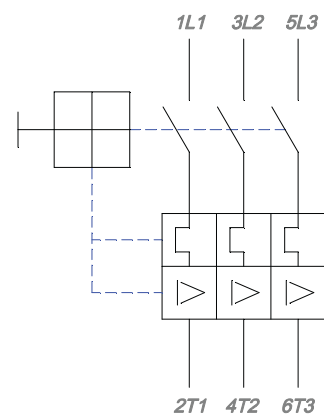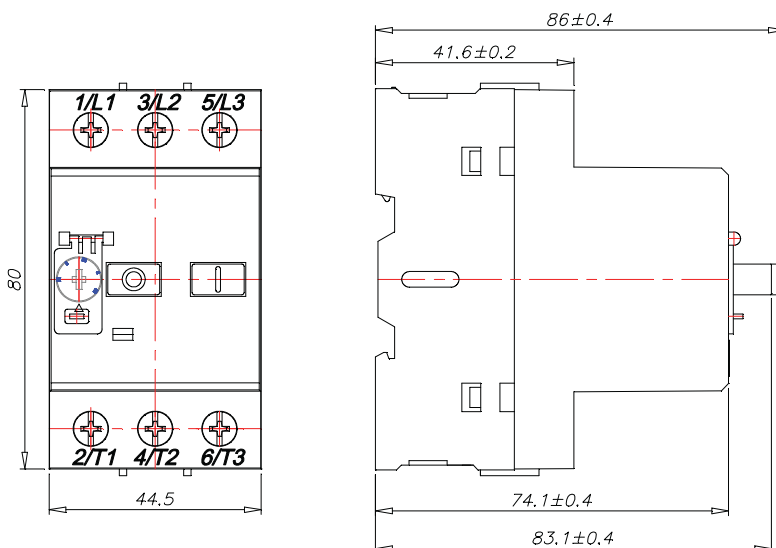

TS EN 60947-5-1

