

FAN SHAKER TIMER TYPE FS

FUNCTION

Dedicated control module with independent adjustable fan run down and shake/clean delay periods

OPERATION


The unit requires a constant supply (A1, A2). The control supply (B1, B2) is provided when the fan contactor is energised. On removal of the control supply the fan run down period commences, after which the internal relay contacts changeover to operate the clean/shake contactor for the selected period before resetting.

TYPE REFERENCE


FS1M - Up to 60 seconds run down, 60 seconds clean/shake.

FS2M - Up to 120 seconds run down, 60 seconds clean/shake.

Add desired voltage 110 or 240 or 415 to complete reference. Eg. FS2M/110.


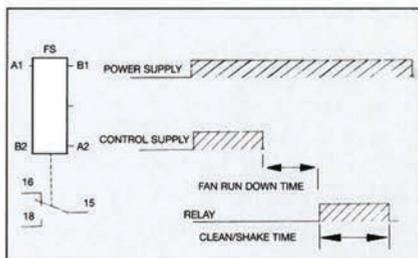


Top of DIN Rail

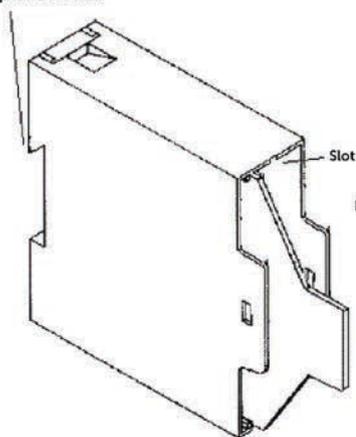

FS2M

Peg

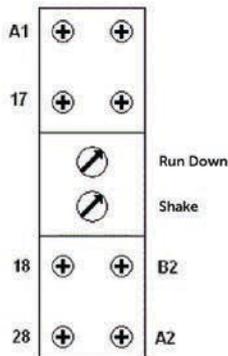

Run Down Time 2m

Shake Time 1M